

CHALION
Your Agricultural Machine



CHALION
Your Agricultural Machine

Henan Qianli Machinery Co., Ltd.

ADD: South Circular Road, Weishi industrial cluster area,

Kaifeng, Henan, China

Mobile: 0086-18236900192

E-mail: info@qln-tractor.com

<https://www.qln-tractor.com>

<https://www.chaliongroup.com>

CHALION
Your Agricultural Machine



QUALITY
ASSURANCE



INHERITANCE
CREATE



INNOVATION
TECHNOLOGY

目录 Contents

Introduction Company 公司简介 >>

04 公司简介

COMPANY INTRODUCTION

05 资质荣誉

QUALIFICATION HONOR

07 实力千里

STRENGTH CHALION

产品介绍

09 (犁) 耙片 (PLOUGH) HARROW DISC

10 圆盘犁 DISC PLOUGH

12 圆盘式松土机 DISC TILLER

13 铧犁 FURROW PLOUGH

14 液压翻转犁 HYDRAULIC FURROW PLOUGH

15 圆盘耙 MOUNTED LIGHT-DUTY DISC HARROW

20 链耙 CHAIN HARROW

20 深松机 SUBSOILER

21 起垄机 DISC RIDGER

22 耙地机 RAKE

23 旋耕机 ROTARY TILLER

25 中耕机 CULTIVATOR

27 撒播机 FERTILIZER SPREADER

28 割草机 MOWER

29 割草机 MOWER

29 搂草机 HAY RAKE

30 平地机 LAND SCRAPER

31 玉米播种机 CORN SEEDER

32 土豆种植机 POTATO PLANTER

32 土豆收获机 POTATO HARVESTER

33 挖穴机 HOLE DIGGER

33 开沟机 TRENCHER

34 喷药机 SPRAYER

34 拖车 TRAILER

35 前装载机 FRONT END LOADER

36 后挖掘机 BACKHOE

37 货物出运 GOODS SHIPPED

38 售后服务 MAINTENANCE AND CARE

河南千里机械有限公司是一家专业生产轮式拖拉机、手扶拖拉机、履带拖拉机、水稻机械以及各种农具的厂家，同时也是中国出口农业机械的重点企业之一。

成立于1988年，河南千里机械有限公司注册资金9000万元，占地面积110,000平方米。目前千里机械设有13条现代化生产线，拥有员工800名。

我公司具有年产5000台机引犁、耙整装配线和300余台加工设备以及机引耙片专用冲压、热处理、喷漆生产一条线，年产可达100万件。产品已经通过<国家产品质量监督检验站>与<农机推广站>鉴定，通过了<国家出入境检验检疫局>检验检疫，符合出口商检要求。通过了CE认证和ISO9001认证，已经批量出口非洲、亚洲、欧洲、澳大利亚以及南北美洲市场。年均自营出口额为1000万美金，产品已经销售到六十三个国家和地区。

Henan Qianli Machinery Co., Ltd. is a professional manufacturer of wheeled tractors, walking-tractors, crawler tractors, rice machinery, and various agricultural implements. It is also one of the key enterprises in China's export of agricultural machinery.

Established in 1988, Henan Qianli Machinery Co., Ltd. registered funds of 90 million yuan, covering an area of 110,000 square meters. At present, there are 13 modern production lines in Qianli Machinery, with 800 employees.

Our company has an annual output of 5,000 machines, complete assembly lines, and more than 300 processing equipment, as well as the special stamping, thermal treatment, and spray paint production of the machine rake, and the annual output can reach 1 million. The product has-passed the <National Product Quality Supervision and Inspection Station> and <Agricultural Machinery Promotion Station> identification, and passed the<National Entry-Exit Inspection and Quarantine Bureau> inspection and quarantine, which meets the requirements of export-commodity inspection. Passed CE certification and ISO9001 certification, and has exported to Africa, Asia, Europe, Australia, and North and South America in batches. The average annual-self-operated export value is 10 million US dollars, and the products have been sold to 63 countries and regions.



资质荣誉>> QUALIFICATION HONOR

千里犁耙 CHALION
TILLAGE THE WORD 耕耘天下 PLOUGH AND HARROW



Tractor Industry Impact Enterprise



Quality Management System



Occupational Health And Safety Management



Environmental Management System



Export Product Quality License



CE Certificate



E-mark(EEC)Certificate



Supplier Assessment Certificate



CE Farm Implement



International Trade Commission



SC Certificate



PC Certificate



PVOC OF KENYA



African Country PVOC

实力千里>>
STRENGTH CHALION




(犁) 耙片 (PLOUGH) HARROW DISC

缺口/圆盘耙片 PLAIN/NOTCHED DISCS



平盘 FLAT COULTERS

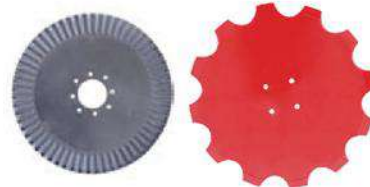

压球试验 BALL-PRESSURE TEST



c	thickness	weight	
16"	3	2.490	100
	3.5	2.880	
	4	3.320	
	4.5	3.720	
	5	4.110	
18"	3.5	3.650	100
	4	4.200	
	4.5	4.740	
	5	5.210	
	6	6.180	
20"	3.5	4.860	100
	4	5.570	
	4.5	6.270	
	5	6.890	
	6	8.160	
22"	4	6.930	50
	4.5	7.810	
	5	8.590	
	6	10.190	
	4.5	9.440	
24"	5	10.390	50
	6	12.350	
	7	14.480	
	8	16.640	
	5	12.490	
26"	6	15.000	50
	7	17.490	
	8	19.940	
	6	17.780	
	7	20.730	
28"	8	23.650	50
	6	20.400	
	8	31.680	
	10	39.000	
	12	63.550	
10"	2.5	860	100
	2	870	
	3	980	
	2	1.040	
	2.5	1.280	
11"	3	1.590	100
	4	1.900	
	5	2.400	
	2.5	1.550	
	3	2.030	
12"	3.5	2.360	100
	4	2.710	
	4.5	3.050	
	5	3.360	
	4	3.480	
13"	3	2.890	100
	3.5	3.320	
	4	3.820	
	4.5	4.300	
	5	4.740	
14"	3.5	4.140	100
	4	4.770	
	4.5	5.300	
	5	5.930	
	6	7.050	
15"	3.5	5.390	100
	4	6.180	
	4.5	6.960	
	5	7.650	
	6	9.080	
16"	4	7.650	100
	4.5	8.620	
	5	9.490	
	6	11.280	
	4.5	10.320	
18"	5	11.380	50
	6	13.540	
	7	15.800	
	8	18.000	
	5	13.830	
20"	6	16.630	50
	7	19.390	
	8	22.130	
	6	19.530	
	7	22.700	
22"	8	26.010	50
	6	22.120	
	8	29.530	
	10	36.330	
	8	34.220	
24"	10	42.150	25
	12	63.400	
	12	63.400	
	12	63.400	
	12	63.400	


圆盘犁 DISC PLOUGH



产品说明 Product description

单向圆盘犁系列产品主要适用于熟地或荒地的耕翻作业，特别适用于耕翻高产绿肥田及稻、麦茬的回田。犁的通过性能、入土性能良好，翻土、覆盖质量能满足农业生产技术要求，且有耕作阻力小，操作调整方便等优点。

The one-way disc plough is suitable for ploughing up the cultivated land as well as virginland, especially for the green manure fields with stubs of rice or wheat. With the good performance of tilling into the soil, it can satisfy the agricultural request. Moreover, the plough has the merits of less working resistance and easy to operate and adjust, etc.

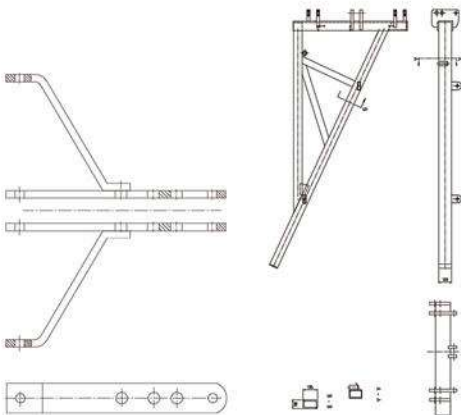

型号 Type	1LYT-225J	1LYT-325J	1LYT-425J	1LYT-525J	1LYT-625J
耕幅 Working width (m)	0.5	0.75	1.0	1.25	1.50
耕深 Working depth (mm)	250-300	250-300	250-300	250-300	250-300
圆盘数量 No. of disc (pc)	2	3	4	5	6
圆盘直径 Dia. of disc (mm)	660	660/710	660/710	660/710	660/710
整机重量 Weight (kg)	350	500	600	700	800
挂接形式 Linkage	II类三点悬挂 Type II three-point mounted				
配套动力 Matched power (hp)	35-50	60-80	80-100	90-120	120-160

型号 Type	1LYQ-315	1LYQ-320	1LYQ-420	1LY(T)-225	1LY(T)-325	1LY(T)-425	1LY(T)-525	1LY(T)-625
耕幅 Working width (m)	0.45	0.6	0.8	0.5	0.75	1.0	1.25	1.50
耕深 Working depth (mm)	180	200	200	250-300	250-300	250-300	250-300	250-300
圆盘数量 No. of disc (pc)	3	3	4	2	3	4	5	6
圆盘直径 Dia. of disc (mm)	450	500	510	660	660/710	660/710	660/710	660/710
整机重量 Weight (kg)	170	190	250	290	420	480	580	750
挂接形式 Linkage	三点悬挂 Three-point mounted			II类三点悬挂 Type II three-point mounted				
配套动力 Matched power (hp)	18-20	25-30	35-50	35-50	55-65	65-80	100	120

圆盘犁

DISC PLOUGH



产品说明 Product description

圆盘犁与拖拉机全悬挂连接配套，作业时犁片旋转运动，对土壤进行耕翻作业，特别适用于杂草丛生，茎秆直立，土壤比阻较大，土壤中有砖石碎块等复杂农田的耕翻作业。具有不缠草，不阻塞、不壅土，能够切断作物茎秆和克服土壤的砖石碎块、工作效率高、作业质量好、调整方便、坚固耐用等特点。

The 1LYX disc plough is completely mounted with tractor. During operation, the disc is rotating to turn the soil, particularly, it is suitable for operation on the field with grasses, straw and stems of crops or plants, big soil resistance and with many stones and break brickbat, etc, in the field. It is good at cutting grasses and straw and free from stopped by the grasses, soil or stones, etc. It is efficient in the work. It is of good quality during operation. It is easy to adjust and strong and durable.

型号 Type	1LYX-230	1LYX-330	1LYX-430	1LYX-530	1LYX-630
耕幅 Working width (mm)	600	900	1200	1500	1800
耕深 Working depth (mm)	250-300				
圆盘数量 No. of disc (pc)	2	3	4	5	6
圆盘直径 Dia. of disc (mm)	660/710				
整机重量 Weight (kg)	280	350	430	520	650
挂接形式 Linkage	三点悬挂 Three-point mounted				
配套动力 Matched power (hp)	40-50	60-80	80-100	100-120	120-160

产品说明 Product description

双向圆盘犁系列产品主要适用于旱作区熟地生荒地的耕翻作业，不仅具有普通圆盘犁的操作性能，还具有地头空行程短、生产率高、省油等特点，特别适用于梯地和小块耕作区的作业。

Two-way disc plough products are mainly used for tillage on dry cultivated or fallow land. They not only have the function of ordinary disc plough, but also have the characteristics of short idle distance of travel on the edge of fields high productivity, low oil consumption etc. They are also suitable for working on terraced fields and small piece of farming land.



型号 Type	1LY(SX)-325	1LY(SX)-425	1LY(SX)-525	1LY(SX)-625
耕幅 Working width (m)	0.75	1.0	1.25	1.50
耕深 Working depth (mm)	250-300			
圆盘数量 No. of disc (pc)	3	4	5	6
圆盘直径 Dia. of disc (mm)	660			
整机重量 Weight (kg)	700	800	900	1000
挂接形式 Linkage	II类三点悬挂 Type II three-point mounted			
配套动力 Matched power (hp)	65-80	80-100	100-120	120-160

圆盘式松土机

DISC TILLER

产品说明 Product description

1LYST-6/7/8片松土机适用于破除地表板结，耕后碎土，播前整理，土肥混合和轻中质土壤的灭茬作业。在熟地上亦可代替犁进行土壤耕翻作业。该机具坚固耐用，使用方便，保养宜行，入土碎土性能良好，耕地后表平整能满足细作的农艺要求，且有耕作阻力小，操作调整方便等特点。

This 6/7/8 disc tiller is designed for field work as breaking hardened and impervious soil surfaces shattering soil after tillage, and planting the land before tillage. It can make soil and fertilizer mix up, clear away the stump of plants, and can be used on cultivated land for tillage, harrowing instead of plowing. This disc tiller is scientific in design, durable in service, ready to operate, easy to maintain, and efficient in pulverizing and penetrating into the soil and leaves the land with smoothness. All these satisfy the agricultural requirements of intensive cultivation and have the characteristics of small tillage and easy operation.



型号 Type	1LYST-6	1LYST-7	1LYST-8
耕深 Working depth (mm)	140-180		
耕幅 Working width (mm)	1200	1400	1600
重量 Weight (kg)	300	320	340
犁片数量 No. of discs (pc)	6	7	8
配套动力 Matched power (hp)	45-50	50-60	60-70
犁片直径 Dia. of discs (mm)	560/610/660		
挂接形式 Linkage	II类三点悬挂 Type II three-point mounted		

产品说明 Product description

1LYTA系列圆盘式松土机适用于破除地表板结，耕后碎土，播前整理，土肥混合和轻中质土壤的灭茬作业。在熟地上亦可代替犁进行土壤耕翻作业。该机具坚固耐用，使用方便，保养宜行，入土碎土性能良好，耕地后地表平整能满足细作的农艺要求，且有耕作阻力小，操作调整方便等特点。

1LYTA series disc tiller is designed for field work as breaking hardened and impervious soil surfaces, shattering soil after tillage, and planting the land before tillage. It can make soil and fertilizer mix up clear away the stump of plants and it can be used on cultivated land for tillage, harrowing instead of ploughing. This disc tiller is scientific in design, durable in service, ready to operate, easy to maintain, and efficient in pulverizing and penetrating into the soil and leaves the land smooth. All these satisfy the agricultural requirements of intensive cultivation and have the characteristics, of small tillage resistance and easy operation.



型号 Type	1LYTA-622	1LYTA-722	1LYTA-822	1LYTA-922	1LYTA-1022
工作宽度 Working width (mm)	1320	1540	1760	1980	2200
工作深度 Working depth (mm)	140-180				
圆盘数量 No. of discs (pc)	6	7	8	9	10
圆盘直径 Dia. of disc (mm)	560				
重量 Weight (kg)	300	320	340	370	400
挂接方式 Linkage	II类三点悬挂 Type II three-point mounted				
配套马力 Matched power (hp)	≥45	≥55	≥60	≥65	≥70
运输间隙 Ground clearance (mm)	>300				

铧犁

FURROW PLOUGH



产品说明 Product description

本系列铧犁为全悬挂式铧式犁，适用于土壤、沙壤土地区熟地旱田耕作。它具有结构简单，耕作适应范围大，作业质量好，地表平整，碎土性能好，墒沟小等特点。

This series is fully suspended plow for soil, sandy loam area foxglove upland farming. It has a simple structure, large farming adaptation range, good quality work, smooth surface, good pulverizer performance, ditches, and other small features.


型号Type	IL-220	IL-320	IL-420	IL-520	IL-620	IL-225	IL-325	IL-425	IL-525	IL-625	IL-725
单犁体耕幅 Single plough body working width (cm)	20	20	20	20	20	25					
最大耕幅 Max. working width (cm)	40	60	80	100	120	50	75	100	125	150	175
最大耕深 Max. working depth (cm)	15-24										
犁体间距 Plough body spacing (cm)	62	62	62	43		57					
配套马力 Matched power (hp)	15-24	25-35	30-35	40-50	55-70	25-35	30-45	40-50	55-80	80-100	90-120
重量 Weight (kg)	68	122	148	185	230	120	158	195	255	340	390
挂接方式 Linkage	三点悬挂 Three-point mounted										

型号Type	IL-227	IL-327	IL-427	IL-527	IL-627	IL-727	IL-230	IL-330	IL-430	IL-530	IL-630
单犁体耕幅 Single plough body working width (cm)	27						30				
最大耕幅 Max. working width (cm)	54	81	108	135	162	189	60	90	120	150	180
最大耕深 Max. working depth (cm)	15-24						20-35				
犁体间距 Plough body spacing (cm)	57						77				
配套马力 Matched power (hp)	25-35	30-45	40-50	55-80	80-100	90-120	40-50	50-80	60-80	90-120	130-160
重量 Weight (kg)	120	158	195	255	340	390	195	260	360	470	590
挂接方式 Linkage	三点悬挂 Three-point mounted										

型号Type	IL-235	IL-335	IL-435	IL-535	IL-635
单犁体耕幅 Single plough body working width (cm)	35				
最大耕幅 Max. working width (cm)	70	105	140	175	210
最大耕深 Max. working depth (cm)	20-35				
犁体间距 Plough body spacing (cm)	77				
配套马力 Matched power (hp)	40-50	55-80	60-80	90-120	130-160
重量 Weight (kg)	195	320	410	550	690
挂接方式 Linkage	三点悬挂 Three-point mounted				

液压翻转犁

HYDRAULIC FURROW PLOUGH

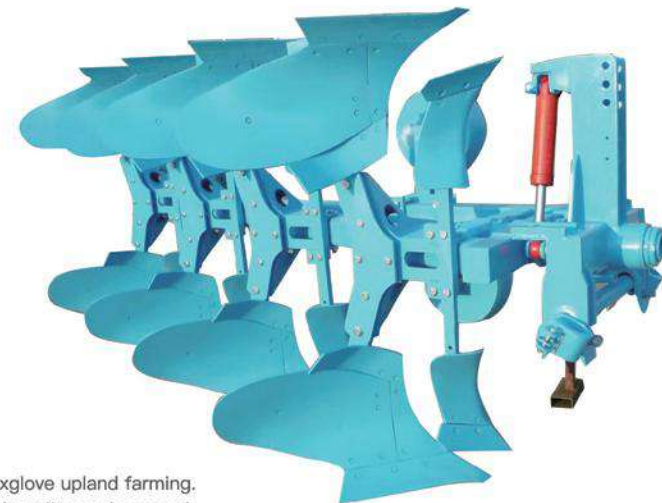

产品说明 Product description

本系列铧犁为全悬挂式铧式犁，适用于土壤、沙壤土地区熟地旱田耕作。它具有结构简单，耕作适应范围大，作业质量好，地表平整，碎土性能好，墒沟小等特点。

This series is fully suspended plow for soil, sandy loam area foxglove upland farming. It has a simple structure, large farming adaptation range, good quality work, smooth surface, good pulverizer performance, ditches, and other small features.

型号 Type	ILYF-325	ILYF-425	ILYF-525	ILYF-625	ILYF-725	ILYF-327	ILYF-427	ILYF-527	ILYF-627	ILYF-727
单犁体耕幅 Single plough body working width (cm)	25					27				
最大耕幅 Max. working width (cm)	75	100	125	150	175	81	108	135	162	189
最大耕深 Max. working depth (cm)	15-24									
犁体间距 Plough body spacing (cm)	57									
配套马力 Matched power (hp)	30-50	40-80	55-90	80-120	90-140	30-50	40-80	55-90	80-120	90-140
重量 Weight (kg)	420	520	720	840	980	420	520	720	840	980
挂接方式 Linkage	三点悬挂 Three-point mounted									



产品说明 Product description

本系列铧犁为全悬挂式铧式犁，适用于土壤、沙壤土地区熟地旱田耕作。它具有结构简单，耕作适应范围大，作业质量好，地表平整，碎土性能好，墒沟小等特点。

This series is fully suspended plow for soil, sandy loam area foxglove upland farming. It has a simple structure, large farming adaptation range, good quality work, smooth surface, good pulverizer performance, ditches, and other small features.

型号 Type	1LF-230	1LF-330	1LF-430	1LF-530	1LF-630	1LF-730	1LF-235	1LF-335	1LF-435	1LF-535	1LF-635	1LF-735
单犁体耕幅 Single plough body working width (cm)	30						35					
最大耕幅 Max. working width (cm)	60	90	120	150	180	210	70	105	140	175	210	245
最大耕深 Max. working depth (cm)	20-35						20-35					
犁体间距 Plough body spacing (cm)	77						87					
配套马力 Matched power (hp)	40-50	50-80	60-80	90-120	130-160	160-200	40-50	50-80	90-155	120-155	130-155	160-200
重量 Weight (kg)	480	680	880	1200	1500	1850	480	700	910	1230	1550	1900
挂接方式 Linkage	三点悬挂 Three-point mounted											

圆盘耙（悬挂式轻型）

MOUNTED LIGHT-DUTY DISC HARROW

产品说明 Product description

1BQX系列悬挂轻耙主要适用于农田的耕后碎土、播前整地、疏松土壤、土肥混合和轻质土壤的灭茬作业。该机具有结构合理、坚固耐用、使用方便、保养易行、碎土能力强、耙后地平整的特点。

1BQ-3.3/3.4/5.0片液压偏置轻耙适用于农土、田的耕后碎播前整地、土肥混合和轻质土壤的灭茬作业。

This series are used for crushing clods after tillage, preparing soil before seeding, loosening the soil, combining the soil and fertilizer, and cleaning away stubble of plants in light soil field. With reasonable structure, strong ability to rake, durable, easy to use and maintain, etc. This series are used for crushing clods after tillage, preparing soil before seeding, loosening the soil, combining the soil and fertilizer, and cleaning away stubble of plants in light soil field.



型号 Type	1BQS-0.6	1BQS-0.8	1BQX-1.1	1BQX-1.3	1BQX-1.5	1BQX-1.7	1BQX-2.0	1BQX-2.2	1BQX-2.3	1BQ-3.3	1BQ-3.4	1BQ-5.0
耕幅 Working width (mm)	600	800	1100	1300	1500	1700	2000	2200	2300	3300	3400	5000
耕深 Working depth (mm)	100-140											
耙片数量 No. of disc (pc)	8	10	12	14	16	18	20	22	24	40	42	60
圆盘直径 Dia. of disc (mm)	460											
整机重量 Weight (kg)	100	120	200	220	250	270	380	400	420	1000	1150	1650
挂接方式 Linkage	三点悬挂 Three-point mounted									牵引 Trailed		
配套动力 Matched power (hp)	10-18 walking tractor	12-18 walking tractor	12-18	15-18	20-25	25-30	35-40	40-45	55	80-100	100	

圆盘耙（对置轻型）

OPPOSED LIGHT-DUTY DISC HARROW

产品说明 Product description

1BQDX系列对置轻耙适用于耕后碎土、播前整地、土肥混合和轻中质土壤的灭茬作业。该机具有结构简单、坚固耐用，使用方便，保养宜行，入土碎土能力良好，耙后地平整能满足精耕细作的农艺要求。

This series are used for crushing clods after tillage, preparing soil before seeding, loosening the soil, combining the soil and fertilizer, and cleaning away stubble of plants in light soil field. With reasonable structure, strong ability to rake, durable, easy to use.



型号 Type	1BQDX-1.25	1BQDX-1.6	1BQDX-2.0	1BQDX-2.3	1BQDX-2.65	1BQDX-3.0
耕幅 Working width (mm)	1250	1600	2000	2300	2650	3000
耕深 Working depth (mm)	100-140					
耙片数量 No. of disc (pc)	16	20	24	28	32	36
圆盘直径 Dia. of disc (mm)	460					
整机重量 Weight (kg)	330	390	460	560	600	650
挂接方式 Linkage	三点悬挂 Three-point mounted					
配套动力 Matched power (hp)	35-40	40-45	50-60	60-75	75-85	85-100

圆盘耙（悬挂中型）

MOUNTED MIDDLE-DUTY DISC HARROW

产品说明 Product description

1BJX系列悬挂中耙适用于耕后碎土，播前整地，土肥混合和轻中质土壤的灭茬作业。该机具有结构简单，坚固耐用，使用方便，保养宜行，入土碎土能力良好，耙后地平整能满足精耕细作的农艺要求。

1BJ系列双折翼液压偏置中耙适用于粘重土壤的耕后碎土以及轻中质土壤的“以耙代耕”耕前灭茬。该机具有结构合理、作业效率高、入土碎土能力强、水平折翼、宽幅作业、窄幅运输等特点。

1BJX series hanging middle harrow: This series is used for crushing clods after the village prepares soil before seeding, loosening the soil, combining the soil and fertilizer, and cleaning away stubble of plants in light soil fields. With reasonable structure, strong ability to rake, durable, easy to use and maintain, etc.

1BJ double folding wings in hydraulic pressure offset middle harrow: This series is used for crushing clods after tillage in sticky heavy fields, the plough up, the scarification before seeding, and cleaning away stubble of plants before tillage in the light soils. This harrow is featured by reasonable structure, high working efficiency, strong capability into the soil and scarification horizontal hinge, wide width task, and narrow width transportation.



型号 Type	1BJX-1.1	1BJX-1.3	1BJX-1.5	1BJX-1.7	1BJX-2.0	1BJX-2.2	1BJX-2.4	1BJX-2.5	1BJX-2.8	1BJ-4.4	1BJ-4.8	1BJ-5.3	1BJ-6.0
耕幅 Working width (mm)	1100	1300	1500	1700	2000	2200	2400	2500	2800	4400	4800	5300	6000
耕深 Working depth (mm)	140												
耙片数量 No. of disc (pc)	10	12	14	16	18	20	22	24	26	40	44	48	56
圆盘直径 Dia. of disc (mm)	560												
整机重量 Weight (kg)	320	350	400	440	470	520	650	700	750	1750	1850	2300	2600
挂接方式 Linkage	II类三点悬挂 Type II three-point mounted									牵引 Trailed			
配套动力 Matched power (hp)	25-30	30-40	40	45	50-55	55-60	65-70	75	80	75-100	≥120	≥140	

产品说明 Product description

1BJXS-1.3/1.5/1.7/2.0/2.2/2.5耙适用于耕后碎土，播前整理，土肥混合和轻中质土壤的灭茬作业。

该机具结构简单，坚固耐用，使用方便，保养宜行，入土碎土性能良好，耙后地平整能满足细作的农艺要求。

主配25-80马力轮式拖拉机。

1BJXS middle-duty disc harrow with 12-24 blades is suitable for pulverizing and loosening clods after cultivating and for planning the land before sowing. On cultivated land, it can make soil and fertilizer mix up and clear away the stump of plants.

The harrow is simple in construction, durable in service, ready to operate, easy to maintain and efficient in pulverizing and breaking into the soil and leaves the land with a smooth even. All these satisfy the agricultural requirements of intensive cultivation. The harrow is best to be used with a 25-80 horsepower wheel tractor.



型号 Type	1BJXS-1.3	1BJXS-1.5	1BJXS-1.7	1BJXS-2.0	1BJXS-2.2	1BJXS-2.5
耕幅 Working width (mm)	1400	1600	1800	2000	2200	2400
耕深 Working depth (mm)	140-200					
耙片数量 No. of disc (pc)	12	14	16	18	20	22
耙片直径 Dia. of disc (mm)	560/610					
重量 Weight (kg)	380	420	460	500	620	700
挂接方式 Linkage	II类三点悬挂 Type II three-point mounted					
配套动力 Matched power (hp)	25-35	35-40	40-45	50-60	55-70	70-80

圆盘耙 DISC HARROW

产品说明 Product description

1BZ 系列液压偏置重耙具有作业效率高、入土能力强、耙后土壤松碎、对粘重土壤、荒地和杂草多的地块具有较强的适应能力。该耙采用焊接方形管为主体的整体式耙架，结构简单，刚性好，并装有液压起落的运输胶轮，转移方便，回转半径小，大大提高了耙的生产效率和使用寿命。

1BZ series hydraulic pressure offset heavy disc harrow has a high working efficiency, strong capability into the soil, and after plough loosens soil. This series can highly adapt to sticky heavy soil, uncultivated field, and those plots of many weeds. This harrow is made of square tubes welded together which ensures a simple structure and good rigidity. This harrow is also equipped with hydraulic lifting rubber wheels for convenient transportation and small turning radius, thus the production efficiency and lifetime of the harrow are dramatically improved.

型号 Type	1BZ-1.6	1BZ-1.8	1BZ-2.0	1BZ-2.2	1BZ-2.5	1BZ-3.0	1BZ-3.4	1BZ-4.0	1BZ-4.4
耕幅 Working width (mm)	1600	1800	2000	2200	2500	3000	3400	4000	4400
耕深 Working depth (mm)	200								
耙片数量 No. of disc (pc)	14	16	18	20	24	28	32	36	40
耙片直径 Dia. of disc (mm)	660								
重量 Weight (kg)	1100	1200	1300	1350	1450	1550	1750	1950	2300
挂接方式 Linkage	牵引 Trailed								
配套动力 Matched power (hp)	65-70	75	80-100	90-100	90-100	100-120	120-140	140-160	

产品说明 Product description

1BZ(BX)系列半悬挂重耙使用在荒地、粘重土壤进行耕前灭茬，耕后碎土。在旱作区熟地可以代替犁进行首次作业。在未耕地上—此耙深可达18厘米，耕后地表平整，碎土和灭茬性良好。该耙挂接容易，调节方便，转变灵活，行驶稳定，道路通过性好。

1BZ(BX) series semi-mounted offset disc harrow: This series is used for cleaning away stubble of plants before tillage and crushing clods after tillage in uncultivated fields, this harrow may replace a plough for the primary tillage. The maximum working depth in uncultivated land can be up to 18cm. The surface of the field after the harrowing work is level and the crushing land-clearing ability of the harrow is satisfactory. This series of harrow can easily be hooked up, simply be adjusted, flexibly change the directions, stably drive and have good pass ability.

型号 Type	1BZ(BX)-1.8	1BZ(BX)-2.0	1BZ(BX)-2.2	1BZ(BX)-2.5	1BZ(BX)-3.0
耕幅 Working width (mm)	1800	2000	2200	2500	3000
耕深 Working depth (mm)	180-220				
耙片数量 No. of disc (pc)	16	18	20	24	28
耙片直径 Dia. of disc (mm)	660				
重量 Weight (kg)	900	1000	1100	1200	1350
挂接方式 Linkage	半悬挂 Semi-mounted				
配套动力 Matched power (hp)	70-80	80-100	80-100	80-100	100-120

圆盘耙 DISC HARROW



产品说明 Product description

BZY型偏置重耙主要适用于农田耕前灭茬，破除地表板结，秸秆切碎还田，耕后碎土、平整保墒等工作，在熟地上亦可代替犁进行土壤耕翻作业。作业效率高、功率利用合理，入土、碎土能力强，耕后地表平整、土壤松碎，对黏重土壤、荒地和杂草多的地块具有较强的适应能力。此耙吸收了国外同类先进产品的优点，整机采用组合式结构，以方形焊接管整体式钢性耙架为主体，配有液压起落充气橡胶运输轮等，结构合理，坚固耐用，运输方便，回转半径小，易于调整，便于维护保养，是目前国内先进的圆盘耙产品。

This disc offset trailing heavy-duty harrow is designed for field work as crop residue processing before tillage, breaking hardened and impervious soil surface, crushing and spreading straw, shattering soil after tillage, planting the land, and preserving soil moisture. It can be used on cultivated land for tillage, harrowing instead of plough. This harrow has a high harrowing capacity with reasonable utilization of power, great ability to penetrate, being well suitable for heavy clay soil, wasteland, and weedy field as well.

Having absorbed all advantages of exotic machines of the same kind, this harrow has adopted a combined structure whose rigid frame is welded with the rectangular tube, and equipped with hydraulic up-and-down road wheels.

型号 Type	BZY1.6	BZY1.8	BZY2.0	BZY2.2	BZY2.5	BZY3.0	BZY3.4
耕幅 Working width (mm)	1600	1800	2000	2200	2500	3000	3400
耕深 Working depth (mm)	180-220						
耙片数量 No. of discs (pc)	14	16	18	20	24	28	32
耙片直径 Dia. of disc (mm)	610/660						
圆耙轴直径 Dia. of round axle (mm)	38				45		
轮胎 Tire type	欧式宽胎 European Tires 10.0/75-15.3						
重量 Weight (kg)	1400	1500	1650	1750	1950	2050	2200
连接方式 Linkage	牵引式 Trailed						
配套动力 Matched power (hp)	≥60	≥65	≥70	≥80	≥90	≥100	≥120
运输间隙 Ground clearance (mm)	≥260						

圆盘耙 DISC HARROW



产品说明 Product description

1BZ(G)型偏置重耙主要适用于农田耕前灭茬，破除地表板结，秸秆切碎还田，耕后碎土、平整保墒等工作，在熟地上亦可代替犁进行土壤耕翻作业。作业效率高、功率利用合理，入土、碎土能力强，耕后地表平整、土壤松碎，对黏重土壤、荒地和杂草多的地块具有较强的适应能力。

此耙吸收了国外同类先进产品的优点，整机采用组合式结构，以方形焊接管整体式钢性耙架为主体，配有液压起落充气橡胶运输轮等，结构合理，坚固耐用，运输方便，回转半径小，易于调整，便于维护保养，是目前国内先进的圆盘耙产品。

This disc offset trailing heavy-duty harrow is designed for field work as crop residue processing before tillage, breaking hardened and imper-vious soil surface, crushing and spreading straw, shattering soil after tillage, planting the land, and preserving soil moisture. It can be used on cultivated land for tillage, harrowing inst-head of plough. This harrow has high harrowing capacity with reasonable utilization of power, great ability to penetrate, being well suitable for heavy clay soil, wasteland, and weedy field as well. Having absorbed all advantages of exotic machines of the same kind, this harrow has adopted a combined structure whose rigid frame is welded with the rectangular tube, and equipped with hydraulic up-and-down road wheels.

型号 Type	1BZ(G)-3.0	1BZ(G)-3.5	1BZ(G)-4.0	1BZ(G)-4.5	1BZ(G)-5.5	1BZ(G)-6.2	1BZ(G)-6.5	1BZ(G)-7.0	1BZ(G)-7.8
耕幅 Working width (mm)	3000	3500	4000	4500	5500	6200	6500	7000	7800
耕深 Working depth (mm)	220-270								
耙片数量 Disc quantity (pc)	24	28	32	36	44	48	50	54	60
耙片直径 Dia. of disc (mm)	710								
圆耙轴直径 Dia. of round axle (mm)	45								
轮胎 Tire type	欧式宽胎European Tires 11.5/80-15.3				欧式宽胎European Tires 4.00/60-15.5				
重量 Weight (kg)	2350	2500	3700	3900	4500	4800	5000	5300	5800
连接方式 Linkage	牵引式Trailed								
配套动力 Matched power (hp)	≥120	≥140	≥180	≥200	≥200	≥220	≥250	≥300	
运输间隙 Ground clearance (mm)	≥300								


链耙 CHAIN HARROW

产品说明 Product description

链耙是平整碎石，种植作物，铺种草皮前的良好选择。通过弹簧钩将6英尺链耙与您的ATV车，UTV车，花园拖拉机相连，使得链网在您驾驶的时候工作。此链耙已经完全组装，可简单的卷起来存放于任何地方。

Chain drag harrow is a great option for those looking to level dirt or gravel, seed food plots, or prep for sod-ding. Simply attach the karabiner from the 6' chain to your ATV, UTV, or garden tractor and let galvanized mesh do the job while you drive. The chain harrow comes completely assembled, and can be easily rolled up for compact storage just about anywhere.

型号 Type	DC-4FT	DC-6FT	DC-8FT	DC-10FT
割幅 Cutting width (mm)	1220	1830	2440	3050
配套动力 Matched power (hp)	25-35	35-40	45-60	70
链条长度 Chain Length (mm)	1220			
链条直径 Chain diameter (mm)	12 / 16			
重量 Weight (kg)	80 / 110	100 / 135	120 / 150	150 / 190

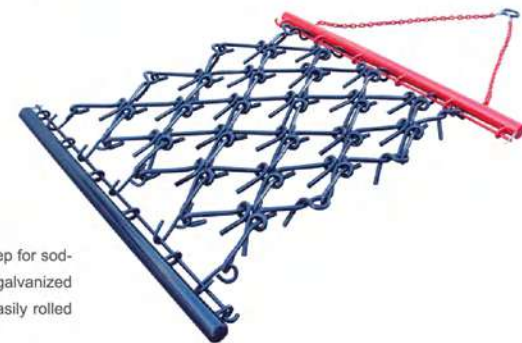

深松机 SUBSOILER

产品说明 Product description

3S系列深松机是我们迎合国外客户需求设计的新型的产品。它适用于马铃薯、豆类、棉花等农作物的深耕作业。该机能破除硬质土地、平整土壤、保持地下水分含量、清除残茬等。该机有深度可调整、应用范围广、易于操作等优点。

3S series of the subsoiler is a new model developed by our company according to the demand of the foreign customers. It is mainly suitable for subsoiling the field of potatoes, beans, and cotton and can break surface soil harden, loosen soil, retain water understand, and clean stubble. It has the advantages of adjustable depth, a wide range of applications, convenient suspension, and so on.

型号 Type	3S-1.2	3S-1.4	3S-1.8	3S-2.1	3S-2.6
耕幅 Working width (mm)	1000	1400	1800	2100	2600
耕深 Working depth (mm)	100-240				
犁体数量 No. of plough body (pc)	5	7	9	11	13
整机重量 Weight (kg)	300	360	420	460	520
挂接方式 Linkage	三点悬挂 Three-point mounted				
配套动力 Matched power (hp)	25	40	50-60	70-80	80-100





起垄机

DISC RIDGER

产品说明 Product description

3Z型可调式起垄机主要适用于农田耕后起垄作业，该机采用方管焊接整体式刚性机械架为主体，配以角度调调式圆盘起垄器，圆盘犁片采用优质65Mn钢，经热处理加工制成。该机具有结构合理、坚固耐用、运输方便、便于调整、使用维护方便等特点。

3Z series adjustable ridge machine is used for marking ridge in the field after tillage. The main frame is made of rectangular tube welded together, assembled with the angle adjustable disc ridging unit. The discs are made of qualified 65mn steel plate with heat treatment. The machine is steady and durable, convenient for transport and easy to adjust operate and maintenance.



型号 Type	3Z-80	3Z-120	3Z-140	3Z-180	3Z-260
耕幅 Working width (mm)	800	1200	1400	1800	2600
起垄宽度 Width of ridging (mm)	200-450				300-500
起垄高度 Height of ridging (mm)	150-240		150-300		
整机重量 Weight (kg)	150	180	200	220	280
挂接方式 Linkage	标准三点悬挂 Standard three-point mounted				
配套动力 Matched power (hp)	15-20	25-30	30-35	55-70	60-90

产品说明 Product description

3QL系列起垄犁主要适用于土豆，大豆，蔬菜的耕后起垄。该产品可自由调节起垄间距，起垄高度，垄行和角度的优点，配套马力广，有良好的适应能力。

3QL series ridger plough is used for ridging in the field of potato, beans, vegetables after tillage. It has advantages of convenient adjustment in ridging spacing, ridging height, ridging rows and angle, wide range of matched tractors, good ability of adaption and so on.



型号 Type	3QL-3	3QL-4	3QL-5
耕幅 Working width (mm)	2500	3200	3900
起垄宽度 Width of ridging (mm)	700-900		
起垄高度 Height of ridging (mm)	200-250		
整机重量 Weight (kg)	240	280	330
挂接方式 Linkage	标准三点悬挂 Standard three-point mounted		
配套动力 Matched power (hp)	40	60	80

起垄机

DISC RIDGER

产品说明 Product description

1ZX 起垄机主要适用于烟草、马铃薯和蔬菜的播种前起垄作业。该产品具有阻力小、垄距可调、操作调整方便等优点，能够满足农业生产技术的要求。

1ZX Disc ridger is suitable for making furrow before planting the seeding of tobacco, potato and vegetable. It could satisfy with the need of agricultural production technology perfectly because it has the advantage of less resistance, easy to operate and so on.



型号 Type	1ZX-3	1ZX-2	1ZXQ-2
起垄行数 Ridging rows	3	2	2
起垄高度 Ridger height (mm)	≥350		≥300
犁片数量 Disc quantity (pc)	6	4	4
重量 Weight (kg)	680/700	660	300
圆盘直径 Disc diameter (mm)	660/710	660	560
连接形式 Linkage	Ⅱ类三点悬挂 Type Ⅱ three-point mounted		Ⅰ类三点悬挂 Type Ⅰ three-point mounted
配套动力 Matched power (hp)	100-120	60-80	35-40

耙地机

RAKE

产品说明 Product description

一种为小型拖拉机配套的农用耙地机。主要为了提高小型机具整地质量，减少作业层次，满足农艺要求。它是在方框形机架下的两个附加横梁上分别安装两组缺口耙片组合两组圆盘耙片组，机架上有调整孔，机架后端有农具联结挂钩和扶手杆。这种耙地机能适应不同质地的土壤，有比较理想的作业效果。

Matchable for small farm tractors, mainly improve the quality of land preparation, reduce operational levels, meet the agronomic requirements. With two groups of gap harrow patches and disc harrow patches on assistant beams under box-shaped rack, adjustment hole on frame, connecting pothooks for connecting dead stocks, and handrails-link on the back; applicable for various soil, with ideal operating results.



型号 Type	R-4	R-5	R-6	R-7	R-8	R-9
耕幅 Working width (mm)	1220	1524	1828	2133	2438	2743
整机重量 Weight (kg)	90	110	120	135	155	170
挂接方式 Linkage	Ⅱ类三点悬挂 Type Ⅱ three-point mounted					
配套动力 Matched power (hp)	18-25	20-25	25	35	50	60

旋耕机 ROTARY TILLER

产品说明 Product description

1GLN欧洲系列旋耕机与半轴齿轮传动；1GLN系列旋耕与侧齿轮传动，它可安装在拖拉机12-90马力。旋耕机的质量好，功能也非常好。它适合于旱地和水田。它可以减少时间、劳动力、成本等。

1GLN series European rotary tiller with side gear transmission. 1GLN series rotary tiller with side gear transmission can be mounted with the tractor 12-90hp. The quality of the rotary tiller is good and the function is very well. It is suited to dry land and paddy fields. It can save time, labor, money, etc.

型号 Type	1GLN-85	1GLN-105	1GLN-125	1GLN-135	1GLN-150	1GLN-160
外形尺寸 Dimensions (L*W*H)(mm)	1025*800*700	1250*800*700	1450*800*700	1550*800*700	1700*800*700	1800*800*700
重量 Weight (kg)	245	265	285	300	320	340
刀片数量 No. of blades (pc)	24	24	30	30	36	42
工作宽度 Working width (mm)	850	1045	1245	1345	1495	1595
工作深度 Working depth (mm)	120					
转速PTO Input speed (r/min)	540					
配套马力 Matched power (hp)	12-20	20-30	25-35	30-40	30-45	40-50

型号 Type	1GLN-165	1GLN-180	1GLN-200	1GLN-210	1GLN-220	1GLN-230	1GLN-240
外形尺寸 Dimensions (L*W*H)(mm)	1850*800*700	2000*800*700	2200*800*700	2300*800*700	2400*800*700	2500*800*700	2600*800*700
重量 Weight (kg)	560	600	620	640	660	680	700
刀片数量 No. of blades (pc)	42	42	48	48	54	54	60
工作宽度 Working width (mm)	1645	1750	1950	2050	2150	2250	2350
工作深度 Working depth (mm)	120-160						
转速PTO Input speed (r/min)	540						
配套马力 Matched power (hp)	50-80	50-80	55-85	60-85	65-85	70-90	75-90



产品说明 Product description

SGTN系列旋耕机采用中间齿轮传动结构，是为15-120马力拖拉机配套的耕作机械。该机采用宽耕幅、对称悬挂使轮迹全部覆盖。该机质量可靠，性能优良，能适合旱地和水田操作。它可以减少时间、劳动力、成本等。

SGTN series rotary tiller is adopted middle gear transmission system, mounted with the tractor of 15-120hp. Tractor wheel tracks are completely covered after tillage as the working width is much wider. The quality is reliable and the performance is well. So it can be used on dry and paddy fields. It can reduce time, labor, cost, etc.

型号 Type	SGTN-120	SGTN-125	SGTN-140	SGTN-150	SGTN-160	SGTN-180	SGTN-200	SGTN-250	SGTN-300
耕幅 Working width (m)	1.2	1.25	1.40	1.50	1.60	1.80	2.00	2.50	3.00
耕深 Working depth (mm)	120-160								
刀片数量 No. of blade	24	24	24	24	24	32	32	40	48
刀片型号 Type of blade	L-245								
整机重量 Weight (kg)	229	234	244	254	265	437	452	475	534
配套马力 Matched power (hp)	15-18	18-20	20-25	25-35	30-40	50-55	65-80	80-100	90-120
挂接形式 Linkage	三点悬挂 (Standard three-point mounted)								

旋耕机 ROTARY TILLER

产品说明 Product description

1GQN系列旋耕机采用中间齿轮传动结构，是为12-120马力拖拉机配套的旋耕机械。该机采用宽耕幅、对称悬挂使轮迹全部覆盖。该机质量可靠，性能优良，能适合旱地和水田操作。它可以减少时间、劳动力、成本等。

1GQN series rotary tiller with middle gear transmission, it can be mounted with the tractor 12-120hp. We can't see the wheel tracks on the soil after it worked. The quality of rotary tiller is good and the function very well. It is suited to dry land and paddy field. It can save time, labor, money, etc.



型号 Type	1GQN-100	1GQN-115	1GQN-120	1GQN-125	1GQN-140	1GQN-150	1GQN-160	1GQN-180
耕幅 Working width (mm)	1000	1150	1200	1250	1400	1500	1600	1800
耕深 Working depth (mm)	旱地 Dry land	80-140				120-180		
		水田 Water land				140-200		
刀片数量 No. of disc (pc)	22	22	26	26	30	34	38	50
整机重量 Weight (kg)	185	190	195	200	205	230	255	320
挂接方式 Linkage	标准三点悬挂 Standard three point mounted				标准三点悬挂 Standard three point mounted			
配套动力 Matched power (hp)	12-15	15-18	15-18	18-20	20-25	25-30	30-40	50-55
外形尺寸 Overall dimensions (mm)	850*1050*950	900*1310*1000	900*1350*1000	900*1450*1000	900*1600*1000	900*1740*1000	900*1880*1000	1020*2056*1152

型号 Type	1GQN-200	1GQN-220	1GQN-250	1GQN-300
耕幅 Working width (mm)	2000	2200	2500	3000
耕深 Working depth (mm)	旱地 Dry land	120-160		
		水田 Water land		
刀片数量 No. of disc (pc)	54	58	62	66
整机重量 Weight (kg)	430	460	480	540
挂接方式 Linkage	标准三点悬挂 Standard three-point mounted			
配套动力 Matched power (hp)	55-75	60-80	75-80	80-120
外形尺寸 Overall dimensions (mm)	1020*2396*1152	1020*2636*1152	1020*2816*1152	1050*2770*1152

中耕机 CULTIVATOR

产品说明 Product description

3Z系列中耕机适用于玉米，棉花及马铃薯土地的中耕作业，能够一次完成不同施工作业，包括中耕，深耕，挖沟，起垄等等。该机有方便调整行距，应用范围广等优点。

3Z cultivator, which is suitable for field inter-tillage operation in corn, cotton and potato fields, can complete various field operations at one time including inter-tillage, subsoiling, ditching, ridging, etc. The machine has the advantages of convenient row pitch adjustment, large range of application, etc.



型号 Type	3Z-2	3Z-3	3Z-4
耕幅 Working width (mm)	1500	2900	3700
耕深 Working depth (mm)	80-150		
起垄行数 Ridging rows	2	3	4
起垄间距 Ridge spacing (mm)	450-600		
整机重量 Weight (kg)	120	130	140
挂接方式 Linkage	标准三点悬挂 Standard three-point mounted		
配套动力 Matched power (hp)	15-30	30	30-45



产品说明 Product description

3ZT系列中耕机适用于玉米，棉花及马铃薯土地的中耕作业，能够一次完成不同施工作业，包括中耕，深耕，挖沟，起垄等等。该机有方便调整行距，应用范围广等优点。

3ZT cultivator, which is suitable for field inter tillage operation in corn, cotton and potato fields, can complete various field operations at one time including inter-tillage, subsoiling, ditching, ridging, etc. The machine has the advantages of convenient row pitch adjustment, large range of application, etc.

型号 Type	3ZT-1.2	3ZT-1.5	3ZT-1.8	3ZT-2.1	3ZT-2.5	3ZT-3.0
耕幅 Working width (mm)	1200	1500	1800	2100	2500	3000
耕深 Working depth (mm)	100-200					
犁体数量 No. of plough body (pc)	5	7	9	11	13	15
整机重量 Weight (kg)	200	280	350	420	500	580
挂接方式 Linkage	三点悬挂 Three-point mounted					
配套动力 Matched power (hp)	20-35	30-45	40-65	60-70	70-80	80-100
外形尺寸 Overall dimensions (mm)	1010*900*1100	1400*900*1100	1860*900*1200	2270*900*1200	1400*900*1100	1860*900*1200

中耕机 CULTIVATOR

产品说明 Product description

3ZY系列中耕机是我们迎合国外客户需求设计的新型的产品。它适用于玉米、棉花、土豆等农作物的中耕、深耕、锄草和起垄等等。该机器有方便调整行距、适用范围广等优点。

3ZY series of cultivators is a new model developed by our company according to the demand of the foreign customers. It can be used to cultivate, subsoil, weed and ridge in the field planted with corn, cotton, beans, potato, and so on. It has the advantages of adjustable row spacing, conveniently changeable between deep loosening and ridging.



型号 Type	3ZY-1.2	3ZY-2.0	3ZY-2.8
耕幅 Working width (mm)	1200	2000	2800
耕深 Working depth (mm)	100-240		
犁体数量 No. of plough body (pc)	2	3	4
整机重量 Weight (kg)	150	210	290
挂接方式 Linkage	三点悬挂 Three-point mounted		
配套动力 Matched power (hp)	25	40	50-60

联合整地机 COMBINED LAND PREPARATION MACHINE

产品说明 Product description

联合整地机能一次完成耕后碎土、疏松土壤、土肥混合、播前整平、镇压等作业，直接备好平坦苗床，可以提高效率，降低作业成本，而且，根茬粉碎还田以后，可以提高土壤有机质含量，改善土壤结构，起到培肥地力、提高粮食产量的作用。

Combined land preparation machine can complete the pulverizer, soil transporting, soil mixing, leveling before sowing, repression, and can be directly prepared flat seedbed they can improve the efficacy, reduce the cost, after stubble ploughing, the organic soil quality contents rise, soil structure improves, the yield improves.



型号 Type	1LZ-3.6	1LZ-4.2	1LZ-5.4	1LZ-7.2
最大耕幅 Max. working width (mm)	3600	4200	5400	7200
耕深 Working depth (mm)	140-180			
耙片数量 No. of disc (pc)	42	50	64	84
耙片尺寸 Disc of type (mm)	460*3			
耙片间距 Disc spacing (mm)	170			
整机重量 Weight (kg)	2350	2680	3320	4360
工作效率 Productivity (ha/h)	2.28	2.66	3.33	4.44
挂接形式 Linkage	牵引式 Trailed			
运输间隙 Trans clearance (mm)	≥160			
配套动力 Matched power (hp)	65-80	80-100	100-120	120-160

撒播机 FERTILIZER SPREADER

产品说明 Product description

CRD 型撒播机是引进美国技术设计制造，主要用于牧草播种、土壤耕前撒播底肥作业。该机具结构简单，使用方便，保养易行，常年批量出口美国等地区，并销往中国西部市场。

CRD series spreader constructed by U.S.A technology is especially for forage seeding and broadcasting fertilizer before cultivating. This kind of machine has the advantages of being simple, easy to operate, and maintain. We export it to the U.S. A all year round and sell it to the west of China.



型号 Type	CRD-400	CRD-600
播幅 Working width (m)	8-16	
整机重量 Weight (kg)	70	80
挂接方式 Linkage	标准三点悬挂 Standard three-point mounted	
配套动力 Matched power (hp)	18-30	20-35
外形尺寸 Overall dimensions (mm)	1150*1100*1150	1250*1250*1150

产品说明 Product description

在播种牧草或农作物，化肥的季节ATV撒播机有助于获得一个良好的开始。流量可控制，方便调节。常年批量出口美国等地区，并销往中国西部市场。

Seeding pastures or cover crops, fertilizers the model ATV helps get a head start early in the season. The adjustable flow control mounted on the ATV is easy to adjust and provides better control over material flow. We export it to U.S.A all year round and sell to west of China.



型号 Type	ATV-400	ATV-600
播幅 Working width (m)	20-35	
整机重量 Weight (kg)	100	125
挂接方式 Linkage	牵引Trailed	
配套动力 Matched power (hp)	18-30	20-35
外形尺寸 Overall dimensions (mm)	1600*1150*1350	1600*1150*1380

割草机 MOWER

产品说明 Product description

SM-1.2/1.5/1.8/2.1 型旋转割草机，主要适用于草场，灌木林地的割草、清理以及地表不平整牧场的更新，改造等作业。机具结构简单，坚固耐用，割茬高低可调，作业性能良好，是较理想的割草，清理牧场的农业机械。

Model SM-1.2/1.5/1.8/2.1 rotary slasher are suitable for cleaning and slashing of bush and grassland. As well as improving of uneven ranch. This sort of slasher is simple in construction, durable in service, adjustable in cutting height and has excellent working performance. They are more ideal agricultural machines for grass slashing and ranch cleaning.



型号 Type	SM-1.2	SM-1.5	SM-1.8	SM-2.1
割幅 Cutting width (mm)	1200	1500	1800	2100
割茬高度 Cutting height (mm)	100-300			
整机重量 Weight (kg)	260	300	360	400
挂接方式 Linkage	三点式半悬挂 Three points semi-mounted			
配套动力 Matched power (hp)	18-30	45-60		60-80

产品说明 Product description

FM系列草坪割草机主要适用于牧草收割，高尔夫球场等大型草坪休整的割草机。该机结构紧凑，性能先进。

FM series of lawn-mower is mainly used for harvesting the grass which grows at the farm, golf course, large lawn recuperation, etc. This machine is compact in structure, advanced in performance.



型号 Type	FM-4FT	FM-5FT	FM-6FT	FM-7FT
割幅 Cutting width (mm)	1200	1500	1800	2100
割茬高度 Cutting height (mm)	25-100			
整机重量 Weight (kg)	150	170	210	280
挂接方式 Linkage	三点式半悬挂 Three-points semi-mounted			
配套动力 Matched power (hp)	18-30	45-60		60-70

割草机 MOWER

产品说明 Product description

9GB-1.4/1.8/2.1型往复式割草机可用于农林牧区在丘陵、坡地、小面积等不同条件下收割天然牧草或种植牧草作业的需求。机具由拖拉机手一人操作，有较好的使用性，越障时可依靠拖拉机液压系统将割草机整机提起。

9GB-1.4/1.8/2.1 reciprocating mower is used for reaping the grass which grows at the farm, forest or pastureland. It works at the hill, sloping field or small field. It controls by the tractor driver and it has the good working performance, the whole mower can be lifted by hydraulic pressure system when the tractor crosses the barrier.



型号 Type	9GB-1.4	9GB-1.8	9GB-2.1/ (Double link)
割幅 Cutting width (mm)	1400	1800	2100
割茬高度 Cutting height (mm)	60-80		
整机重量 Weight (kg)	125	135/170	145/180
挂接方式 Linkage	标准三点式悬挂 Standard three-point mounted		
配套动力 Matched power (hp)	12-20	12-20	25/50

搂草机 HAY RAKE

产品说明 Product description

9L系列耙地机适用于装配小型四轮拖拉机，并用于收集收割后的牧草。此机具采用液压转向，弹簧钢弹尺及其他部件。工作的同时，液压转向机构能够立即让耙尺整体入土并卸载牧草。

9L series of hay rake is equipped with the small four wheel tractors and the machine is used for collecting grass after cutting. The machine adopts hydraulic turning, the spring steel tines and other components. During the time of work, the hydraulic turning mechanism can make the tine turn whole and unload the pasture grass immediately.




型号 Type	9L-1.4	9L-1.6	9L-1.8	9L-2.1
割幅 Cutting width (mm)	1400	1600	1800	2100
配套动力 Matched power (hp)	18-20	20-25	20-25	20-25
工作效率 Productivity (ha/h)	15-20			
重量 Weight (kg)	110	140	150	160

平地机 LAND SCRAPER

产品说明 Product description

BX 系列平地机适用于构筑路基和路面，修筑边坡，开挖边沟，也可搅拌路面混合料，扫除积雪，推送散粒物料以及进行土路和碎石路的养护工作。

BX series land scraper: This series is used for the construction of roadbeds and road surfaces, side ditch, mixing road mixtures, removing snow, transporting grain materials, maintenance of dirt roads and gravel roads, etc.

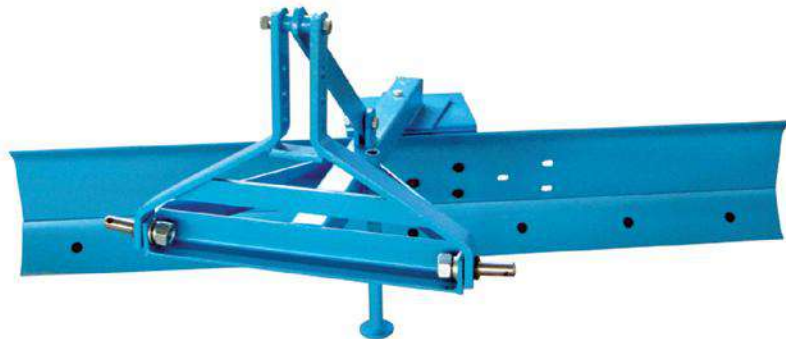

型号 Type	BX-4	BX-5	BX-6	BX-7
耕幅 Working width (mm)	1200	1500	1800	2100
箱刀深度 Overall depth (mm)	550			
配套动力 Matched power (hp)	20	25	30	40
重量 Weight (kg)	85	95	105	125
悬挂方式 Linkage	I类三点悬挂 Type I Standard three-point mounted			

产品说明 Product description

SBX系列箱式平地机是一种利用刮刀平整地面的土方机械。刮刀装在机械前后轮轴之间，能升降、倾斜、回转和外伸。动作灵活正确，操纵方便，平整场地有较高的精度，适用于构筑路基和路面、修筑边坡、开挖边沟、也可搅拌路面混合料、扫除积雪、推送散粒物料以及进行土路和碎石路的养护工作。

SBX series cabinet land scraper: Use scraper fitted between front and back rear wheels to unkut land, can lift, slope, revolve, and extend. Flexible and accurate, easy to use. This series is used for the construction of roadbeds and road surfaces, side ditch, mixing road mixtures, removing snow, transporting grain materials, maintenance of dirt roads and gravel roads, etc.



型号 Type	SBX-4	SBX-5	SBX-6	SBX-7	SBX-8
耕幅 Working width (mm)	1220	1530	1830	2135	2440
箱刀深度 Overall depth (mm)	550				
配套动力 Matched power (hp)	18-25	20-25	25-40	30-40	35-45
重量 Weight (kg)	135	170	206	229	258
悬挂方式 Linkage	I类三点悬挂 Type I standard three-point mounted				

玉米播种机 CORN SEEDER



产品说明 Product description

采用重力清种，不伤种子；清种精度高，播量均匀、稳定、省种、少间苗；采用“零速”、等势、低位投中、穴位精确，苗齐、苗壮，苗距均匀；主播玉米，监播大豆、棉花、花生、油菜，一机多用，播种同时，可同时施有机肥，事先覆土镇压；排种器由齿轮转动，主动齿轮内有防倒机构，避免机具倒转而引起故障；调整不同从动齿轮，可调株距；清种时可摘下整个排钟盘盖，清种方便而彻底。该机在已耕地和未耕地均可适用。该机开沟窄，保墒好，化肥正施、侧施均可，配套范围广。

Sowing by weight, no damage to seeds. High precise seeds clearance, evenly showing stable, seeds saving and less thin out seeding. Adopts "zero speed", equal potential energy, low position feeding sturdy, seeding spacing is even. Mainly for sowing corn, can also sow bean cotton seeds, peanut, and sunflower seeds. It has multiple functions. The machine can spread the basic fertilizer during planting and can complete the suppression at the same time. The feed outlet is driven by gear to avoid troubles arising from the machine's reverse turning. May adjust rows spacing by adjusting different driven gears. Can pick out the whole disc cover when you clear the seeds. Seeds clearance is convenient and thorough. The machine has the characteristics of narrow trenching, moisture, and the front of the fertilizer, and side spreading is suitable the machine can match a wide of tractors.

型号 Type	2BYCF-3	2BYCF-4	2BYCF-5	2BYCF-6
播种深度 Sowing seeds depth (mm)	30-50			
行距 Rowing spacing (mm)	500-700			
整机重量 Weight (kg)	150	200	260	350
挂接方式 Linkage	标准三点悬挂 Three-point mounted			
配套动力 Matched power (hp)	12-20	20-30	30-40	50-60



土豆种植机 POTATO PLANTER

产品说明 Product description

2CM系列马铃薯种植机引进国外生产马铃薯机械的先进技术，该机配套四轮拖拉机，集开沟、施肥、播种、覆土为一体，可一次完成施肥、播种、起垄作业。2CM系列马铃薯种植机配套20-90马力的四轮拖拉机使用，种植行距和株距可以自动调整。

The 2CM series potato planter, introducing the advanced technology for producing potato planters aboard, matches the four-wheel tractor and combines ditch, manuring, sowing, and casing soil together, it can complete manuring and sowing instantaneously. The 2CM series potato machine matches with the 20-90hp four-wheel tractor and the raw spacing and the planting distance are adjustable.



型号 Type	2CM-2 (双垄)	2CM-1 (单垄)	2CM-2A (双垄四行)
整机重量 Total weight (kg)	200	180	380
垄距 Row spacing (cm)	50-80	/	50-100
株距 Planting distance (cm)	18-35	18-35	18-35
作业效率 Working efficiency (hm ² /h)	0.4-0.6	/	0.6-1
种箱容积 Seed tank capacity (m ³)	0.24*2	0.24*1	0.24*2
肥箱容积 Manure tank capacity (m ³)	0.08*1	0.08*1	0.08*2
配套动力 Matched power (hp)	20-35	20-35	50-90

土豆收获机 POTATO HARVESTER

产品说明 Product description

4U系列番薯类收获机与具有后动力(或侧置动力)输出轴的22-120马力拖拉机配套使用。其工作原理是通过拖拉机的带动，挖掘铲将土及收获物挖起，通过振动筛使收获物和土壤分离。

4U series potato harvester is used in conjunction with 22-120 horsepower tractors with a rear power (or side power) output shaft. Its working principle is driven by the tractor, the digging shovel digs up the soil and the harvest, and the harvest and the soil are separated through the vibrating screen.



型号 Type	4U-1	4U-1A	4U-1B	4U-2/2B
行数 Lin No.	单行 Single	单行 Single	单行 Single	双行抛撒 Double scattering
性能 Function	抛撒 Scattering	配手扶 Match hand tractor	集堆自卸料 Bunched dumping material	集堆自卸料 Bunched dumping material
行距 Row spacing (mm)	550-800	500-650	550-800	550-800
生产率 Productivity (mu/h)	3-5			8-15
重量 Weight (kg)	180	100	120	400/500
配套马力 Matched power (hp)	22-35	8-15	22-35	50-80
工作深度 Working depth (mm)	250	200	250	250
工作宽度 Working width (mm)	650	560	650	1300

挖穴机 HOLE DIGGER



产品说明 Product description

该机适用于各型土壤、工地作业，于25-50马力拖拉机配套具有结构紧凑，机动性强、效率高、使用方便简单等特点。

This machine are mainly suitable for tillage on all types of soil land and building site, it is common used for 25-50hp tractor with advantages of compact structure, strong flexibility, high productivity and convenient to use.

型号 Type	1WX-200	1WX-400	1WX-500	1WX-600	1WX-700	1WX-800	1WX-900	1WX-1000
配套动力 Matched power (hp)	25-35				50			
钻头直径 Drill diameter (mm)	Φ200	Φ400	Φ500	Φ600	Φ700	Φ800	Φ900	Φ1000
工作深度 Working depth(mm)	≤1200							
转速 Rotate speed (r/min) 动力输出轴/刀轴 PTO Rhaft	536/246				540/248			
生产率 Productivity (hole/min)	3-5							
与拖拉机连接方式 Linkage	标准三点式连接 Standard three point mounted							
重量 Weight (kg)	235	245	250	255	270	271	277	283

开沟机 TRENCHER

产品说明 Product description

本机广泛用于果园挖沟施肥、种植山药、草药和其他深根作物，以及地下灌溉渠道、自来水管和地下电缆铺设。又适合于葡萄埋藤越冬。埋管和埋光电缆时，该机作业效果更显突出。该机的特点是结构紧凑，体积小，负荷轻。零件通用性强，不怕潮湿和粘性土地。而且抛土宽，沟底清土平整，如田地较干，效果更佳。且操作方便、快捷、灵敏、可靠。该机结构简单，维护容易，质量佳，使用寿命长，投资少，见效快。



This machine is widely used in the orchard ditching fertilization, planting yams, medicinal herbs and other deep root crops, as well as imitation underground channels, water pipes and underground cable laying. Also suits the grape buries the can to survive in winter, when the pipe installation or buries the light electrical cable, this machine work effect is prominent.

This Machine Characteristic.

The structure is compact, the volume is small, the shoulders are light, the components are versatile, do not fear and the coherent paddlers, throw the earth to be wide, the ditch sole razes clear entire, if the paddies do the effect to be better, and ease of operation, quick, keen, reliable.

The structure is simple, easy to maintain, the quality is good, the service life is long, invest few, and effective quickly. (This sort of trencher is simple in construction, durable in service, easy to maintain, and effective quickly.)

型号 Type	1K-120
配套动力 Matched power (kw)	12.5-25.8
工作深度 Working depth (mm)	0-1200
工作宽度 Working width (mm)	100-300
工作速度 Working speed (m/h)	80-100

喷药机 SPRAYER

产品说明 Product description

新型的杆式喷药机适用于轮式拖拉机，3W系列悬挂式杆式喷药机有很多优势，使用灵活，操作简单，便于农作物的灭虫、施肥和除草。该机器管道采用特殊防腐材料，有优良的耐腐蚀性能。另外，机器采用双杠隔膜泵的流体泵压力稳定，喷杆的高度可以根据需要调节，操作便利。



As a utility model rod-spray machine hung onto a wheel tractor, this 3W series suspended type rod spray machine owns many a advantages, such as flexible use, simplified operation, and alike, so it is suitable for the extermination of disease and insect pests of crops, foliar nutrient and herbicide spray. For the pipelines of the machine, adopt special anti-corrosive material so that excellent corrosion-resistance performance, in addition, adopt a double-cylinder membranous pump for the fluid pump in order to acquire stable working pressure and even spray, also the height of the spray-rod can be regulated as required so that it is convenient for the operation by the driver of the tractor.

型号 Type	3W-400	3W-600	3W-800	3W-1000	3W-1200
药箱容积 Medicine volume (L)	400	600	800	1000	1200
喷幅 Spray width (m)	6	8	10	12	14
液泵流量 Pump flow (l/min)	90-120				
喷头数量 Nozzle number (pc)	12	16	20	24	28
喷头类型 Nozzle type	组合式防滴喷头 Combined-type anti drops nozzle				
喷杆形式 Spray stem type	折叠式 Folding 折叠式				

拖车 TRAILER

产品说明 Product description

7C系列农用拖车有0.5-15吨多个规格，该产品结构合理，外形美观，经济耐用，可与多种型号的拖拉机配套。7C系列农用拖车分为挂式和半挂式，自卸和非自卸等多种形式，可与8-120马力各种型号拖拉机配套，适用于公路和田间运输。



The 7C series farm trailer has various types from 0.5T to 15T. The product has a reasonable structure: beautiful appearance, economic, durable and can match various types of tractors. 7C series agriculture divide into the suspension type and half suspension type with the trailer, self-discharging and not self-discharging, and so on. The load-carrying capacity matching each kind of 8-120 horsepower tractor is suitable for road and feld transportation.

型号 Type	7C-1.5 / 7CX-1.5	7C-2 / 7CX-2	7C-3 / 7CX-3	7C-4 / 7CX-4	7C-5 / 7CX-5	7C-6 / 7CX-6	7C-10 / 7CX-10
运输尺寸 Carriage dimension (mm)	2000X1000X450	2400X1200X450	3000X1600X450	3120X1920X460	3950X2190X550	4500X2150X550	6000X2150X550
载重 Load (kg)	1500	2000	3000	4000	5000	6000	10000
自重 Dead weight (kg)	200 / 280	360 / 430	580 / 680	750 / 910	1400 / 1700	1750 / 2050	2400 / 3000
轮胎 Tyre type	6.00-16/2	7.00-16/2	7.5-16/2	8.25-16/2	8.25-16/4	9.00-16/4	8.25-16/8
卸货方式 Unload form	自卸/非自卸 Manual / Hydraulic dump						
配套马力 Matched power (hp)	12-18	12-25	25-40	25-50	40-60	50-90	80-100

前装载机

FRONT END LOADER




产品说明 Product description

欧标快换挂钩，可靠、稳定、可调节的重型支腿设计，安装拆卸更简单方便。高性能欧洲品牌液压控制系统，为多功能机具提供液压控制。

European standard fast replacement hook, reliable, stable, and adjustable heavy-duty outrigger design, making installation and disassembly easier and more convenient. A high-performance European brand hydraulic control system provides hydraulic control for multi-function implements.



型号 Type		TZ02D	TZ03D	TZ04D	TZ06D	TZ08D	TZ10D	TZ12D	TZ16D
配套动力 Matching tractor	hp	15-25	20-40	30-55	45-60	55-75	70-100	90-140	140-180
机具销轴处最大提升高度 Max.lifting height at implement pivot Pin	mm	2350	2550	2740	3010	3400	3710	3970	4260
卸载高度 Dumping height	mm	1730	1840	2100	2370	2480	2720	3000	3200
装载高度 Overloading height	mm	2170	2370	2560	2830	3220	3490	3770	4000
卸载距离 Dumping distance	mm	370	500	600	640	690	740	900	900
动臂销轴高度 Ground clearance at Arm pivot pin	mm	1120	1200	1360	1500	1630	1780	1930	1930
最大收料处 Max.tip in angle	Degree°	48	48	48	48	54	54	54	54
卸料角 Tip out angle	Degree°	52	58	58	58	58	58	58	58
底部后倾角 Crowd angle at lowered lift arm	Degree°	140	135	135	135	135	145	145	145
挖掘深度 Digging depth	mm	90	100	100	120	140	180	200	200
机具销轴处提升力 Lifting force at Implement pivot pin	kg	1821/ 1184	2224/ 1474	2144/ 1321	2150/ 1286	1997/ 1187	2308/ 1452	2403/ 1690	2620/ 1850
标配铲斗型号 Bucket model(standard)		02DP125	04DP125	04DP140	06DP150	08DP160	08DP170	12DP200	16DP240
铲斗宽度 Bucket width	mm	1250	1250	1400	1500	1600	1700	2000	2400
铲斗容量 Bucket capacity	m³	0.16	0.18	0.21	0.35	0.40	0.44	0.7	1.6
额定载荷 Rated lifting capacity	kg	200	300	400	600	800	1000	1200	1600

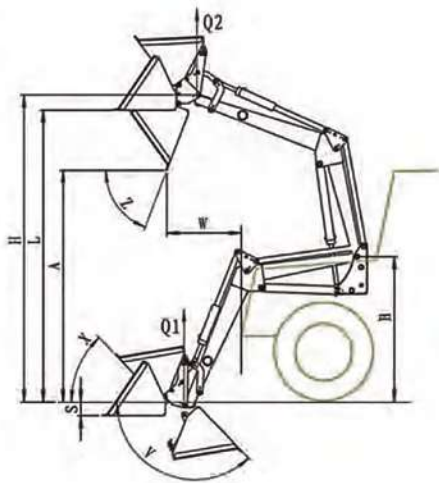

后挖掘机

BACKHOE

产品说明 Product description

高强度低合金结构钢和高强度耐磨钢，结合高性能液压元件，带来极佳的使用体验。

High strength low alloy structural steels and high strength abrasion resistant steels, combined with high-performance hydraulic components make great user experiences.



全回缩、全锁止的道路安全行状态
Secure transportation with arm swing back and shear pins in



三点悬挂专用支撑机构及支撑效果
Exclusive supporting bracket for-point hitch and practical effect



PTO

型号 Type		LW-5	LW-6	LW-6E	LW-7	LW-7E	LW-8	LW-8E	LW-10	LW-10E	LW-12
配套动力 Matching tractor	hp	15-25	20-35	30-55	50-90	70-120	100-180				
最大挖掘深度 Max.digging depth	mm	1650	2000	2400	2800	3200	3655				
最大卸载高度 Max.unloading height	mm	1530	1860	2050	2380	2650	3627				
最大挖掘高度 Max.digging height	mm	2600	2970	3210	3460	3770	5040				
工作半径 Working radius	mm	2300	2700	3140	3600	3920	4510				
离地高度 Ground clearance	mm	450			500			700			
侧移量 Side shift distance	mm	0	0	770	0	770	0	1000	0	1200	0
最小运输宽度 Min.transporting width	mm	1150	1700	1470	1700	1470	1700	1700	1850	2000	2100
最大支持宽度 Max.width of supporting legs	mm	2100	2200	1470	2200	1470	2200	1700	2300	2000	2550
挖斗宽度 Bucket width	in.	14			16			18			22
斗容 Bucket capacity	m³	0.03	0.03	0.04	0.05	0.06	0.07	0.13			
重量 Weight	kg	360	550	600	560	620	630	700	800	1000	1500
PTO液压系统 PTO hydraulic system		6/8/21键 6/8/21 Splines(选配Option)									
拇指夹 Thumb grab		选配 Option									



货物出运

GOODS SHIPPED



售后服务 >>

MAINTENANCE AND CARE

Henan Qianli Machinery Co., Ltd. will train your operators, provide follow-up visits to review the equipment use, and advice on optimal utilization of wear parts.

We have built overseas parts centers in West Africa, Eastern Europe, Australia, etc. A total 10000 square meters warehouse to deliver service parts for global customers.

We also can offer 24*7*365 online engineer service and solve the problems for you ASAP.

Our after-sale service team will deliver prompt and complete service to keep your job moving forward.

The technicians of our team offer super service ranging from routine maintenance and accident repairs to customization and reconditioning.